



# WG20

## Geared Motors

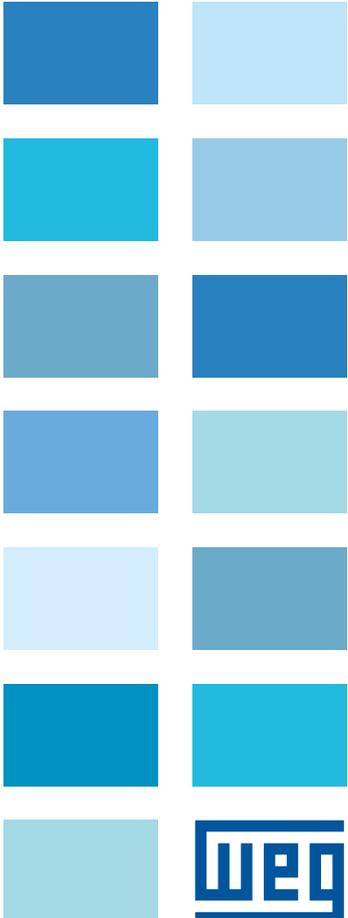

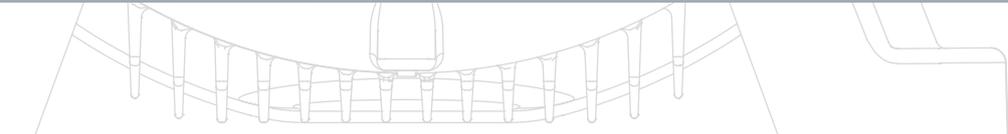

## WEG Group - Transforming energy into solutions.

WEG is a leading global manufacturer and solutions provider of drive technology, energy production and distribution, and automation systems and switchgear construction.

Founded in Brazil in 1961 by three entrepreneurs, WEG has grown to become one of the most important global manufacturers of electric motors. WEG has more than 30,000 employees around the world. The annual turnover of around 3 billion euro reflects its increasing success. The company's global presence is supported by branches in 29 countries, production facilities, and a network of authorised dealers on all five continents.

# Your requirements - our expertise

As one of the leading global manufacturers and solutions providers of drive technology, WEG's aim was to expand its extensive range of products by gear units produced in its own facilities. Perfect coordination of products throughout the drive train has put WEG in a position to offer customers even more superior and efficient solutions.

Under the leadership of Watt Drive, the challenge was to develop a program which not only meets the current demands of the market, but also satisfied WEG's high quality requirements. The Group's own centre of excellence for geared motors in Austria, part of the WEG Group since 2011, can draw on more than 40 years of experience in development, production and sales of gear units and geared motors.

In order to satisfy the requirements of state-of-the-art geared motors the following market requirements were taken into account during the development phase:

## Standard mounting dimensions

For users, the aim was to make the new range of geared motors as easy and effortless to use as possible. To ensure installation in an existing system or production line worked effortlessly without incurring unnecessary costs for conversions, the developers decided to adapt the

mounting dimensions of the new gear units to products already established on the market. The objective: worldwide, easy and cost-effective interchangeability.

## Torque transmission

The gear units needed to be compact, efficient, robust and reliable. In order to achieve this goal a transmission had to be designed which allows large ratio ranges in a two-stage model while being able to integrate easily into the new design gear housing.

## Efficiency

Energy efficiency has always been of paramount importance to WEG. The aim here was to live up to this demand when designing the new WG20 geared motors. This requires the perfect interaction of sophisticated technology and exclusive use of high quality components.

## Worldwide use

To meet the requirements of global mechanical and plant engineering, it was vital that the new geared motors can be used worldwide, whilst maintaining a high level of flexibility for applications.

The solution is **WG20**.



# WG20 - a new generation of geared motors

WG20 is the first geared motor range to be completely developed in-house at WEG. It comprises helical, parallel shaft and helical bevel gear units with torques between 50 and 600 Nm. These two-stage units excel with their large ratio range, as well as being exceptionally efficient thanks to the sophisticated design. The light, yet robust, aluminium housing of the gear units in the WG20 range provide a highly versatile and reliable product, with a wide range of possible applications.




## Highly efficient

The gear units are two-stage designs featuring a large ratio range, which in turn makes them highly efficient. Furthermore, the products of the WG20 series demonstrate only extremely low power losses. On the one hand, this is achieved by low circumferential speeds in the input stage and, on the other hand, by reducing splashing losses due to optimised amounts of lubricant. These characteristics also have a positive effect on the gear lifetime. Under normal conditions of use, they are maintenance-free and lubricated for life.



## In line with market requirements

For maximum user convenience, the housing of the new gearbox series has been designed in keeping with market requirements. The crucial mounting dimensions of the design correspond with the specifications already established on the market which allows for direct exchange. This means that WG20 geared motors are not only suitable for use in new applications, but can also be easily integrated into existing systems as a replacement or for optimisation purposes.

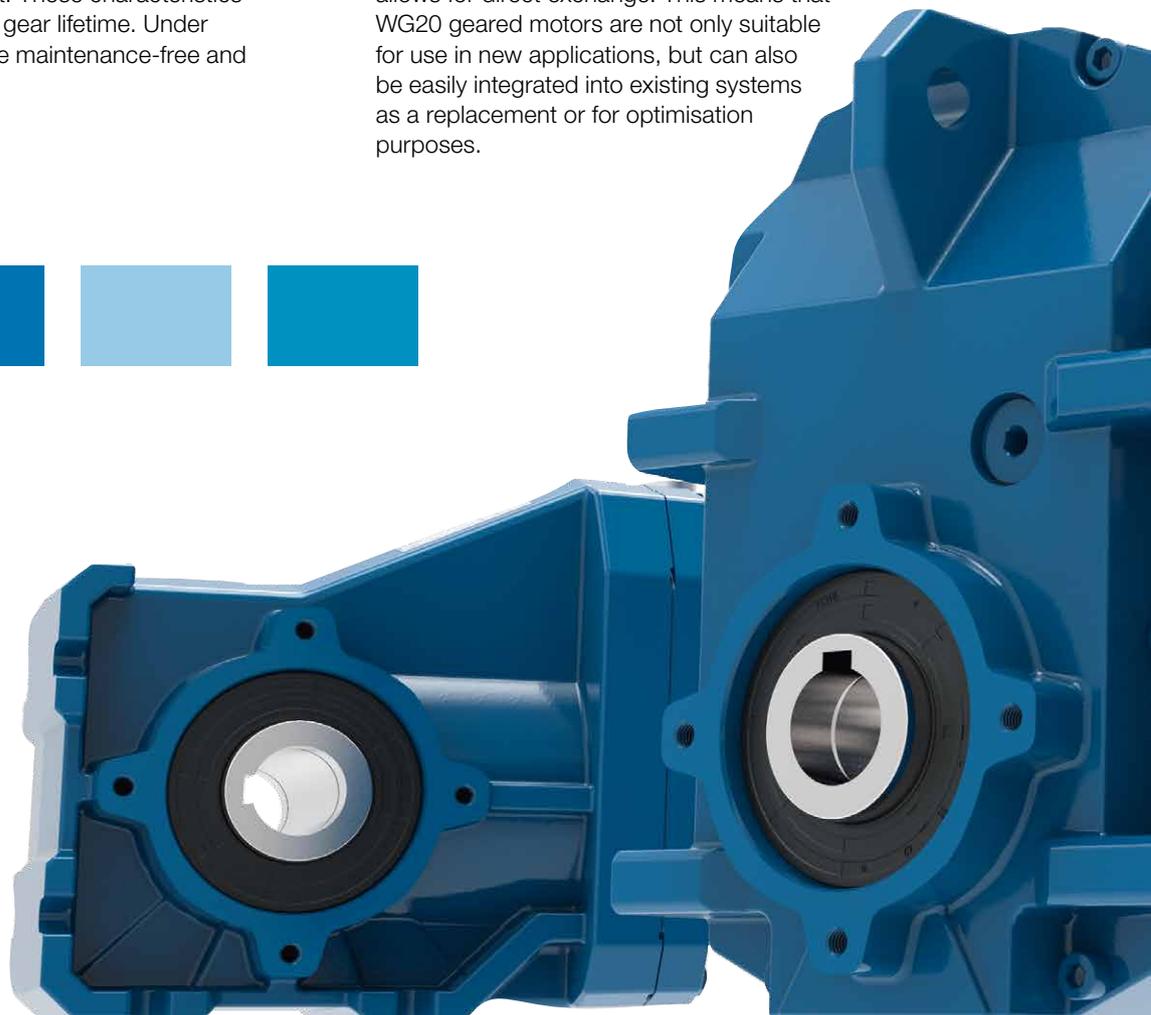



## Optimised design

When designing the new gear unit range, the designers paid particular attention to develop a robust housing, opting for a light aluminium construction. The die casting process used in production not only benefits from a smooth surface for demanding hygienic applications, but also features excellent heat conductivity. The housing design additionally enhances this property. The intelligently designed surface encourages heat dissipation from the internal gear parts, thereby aiding more efficient operation and a longer life.

Gear teeth geometry has also been refined. Calculations applying the finite element method have optimised gear teeth safety, especially in the tooth base area. High quality standards in the gear wheel production process not only ensure a sound and smooth operation, but also increased durability.

The overall compact design also affects the amount of lubricant used, helping to conserve resources when handling raw materials. Due to the arrangement of gearing units and optimised housing interior, only low levels of oil are necessary in the gear unit.

WEG has also achieved improvements on the input side. The end shields and terminal box are now made of light aluminium which considerably reduces the weight of the geared motor. Furthermore, the terminal box dimensions have been changed for ease of access.




## Less noise

The WG20 series gear units are characterised by their smooth, quiet operation.

High quality components, which originate almost exclusively from in-house production, engage perfectly to provide the basis for guaranteed low noise operation. Even the flexible gear wheel construction helps reduce noise emission. The small motor pinion allows for lower circumferential speeds in the first stage and reduced noise emissions.




Motor pinion

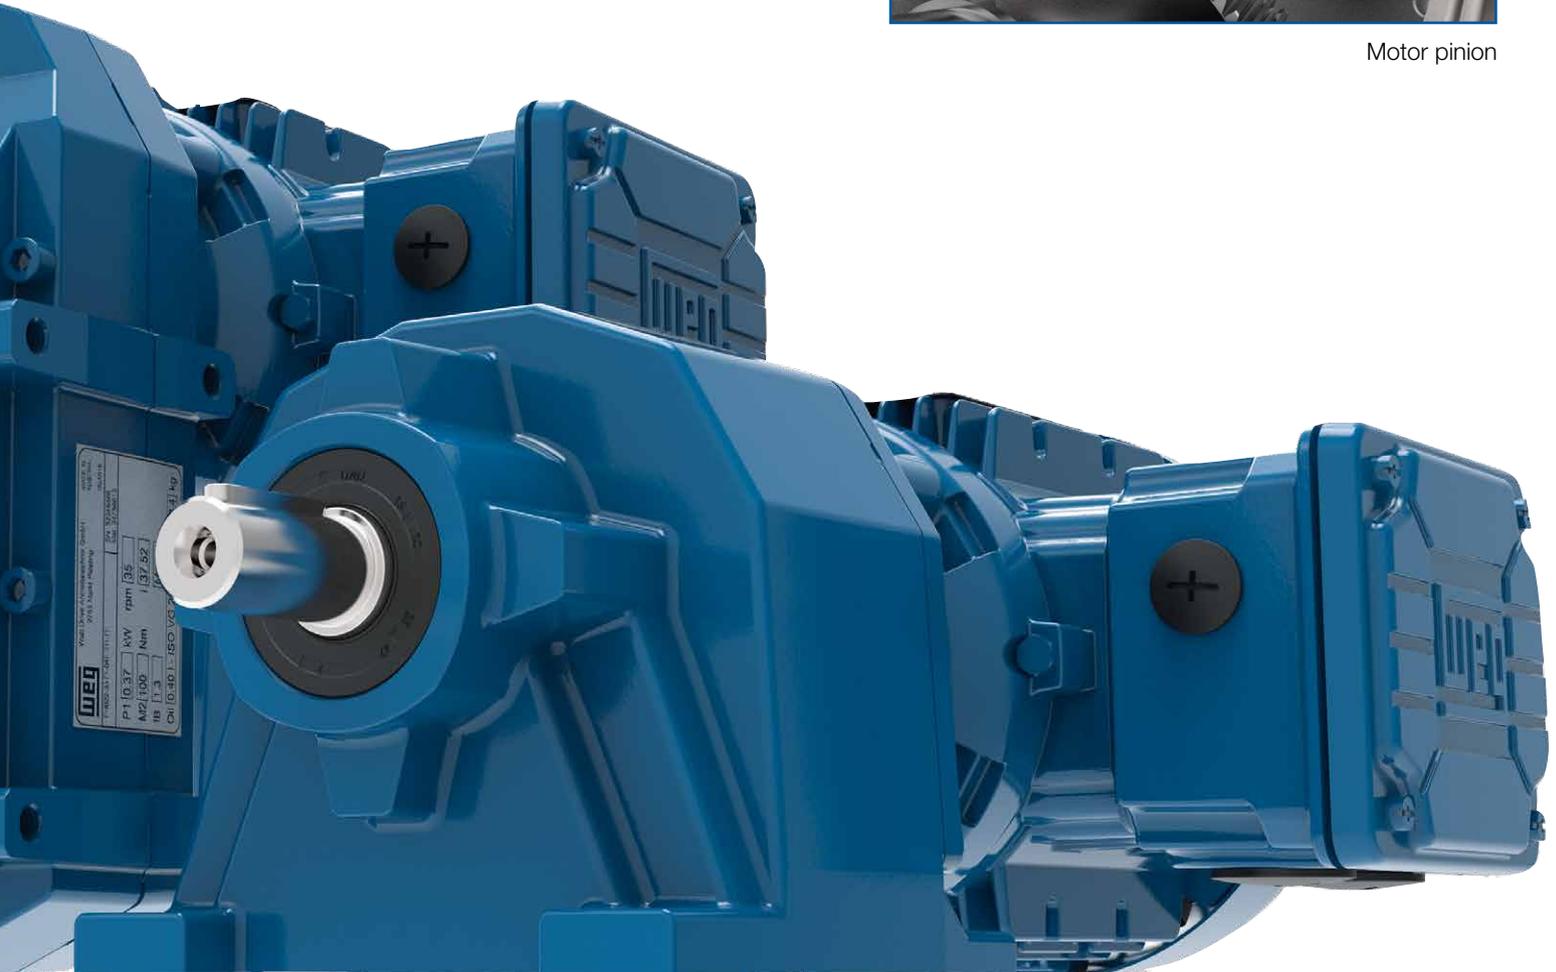

## Helical geared motors C

The helical gear units come in five housing sizes for nominal torques from 50 to 600 Nm and are available in both foot and flange designs. While the two smaller gear units (C00 and C01) are able to perform to their full potential with just two stages, the larger C03 to C06 are available in both two and three-stage versions, for those applications in higher torque ranges.

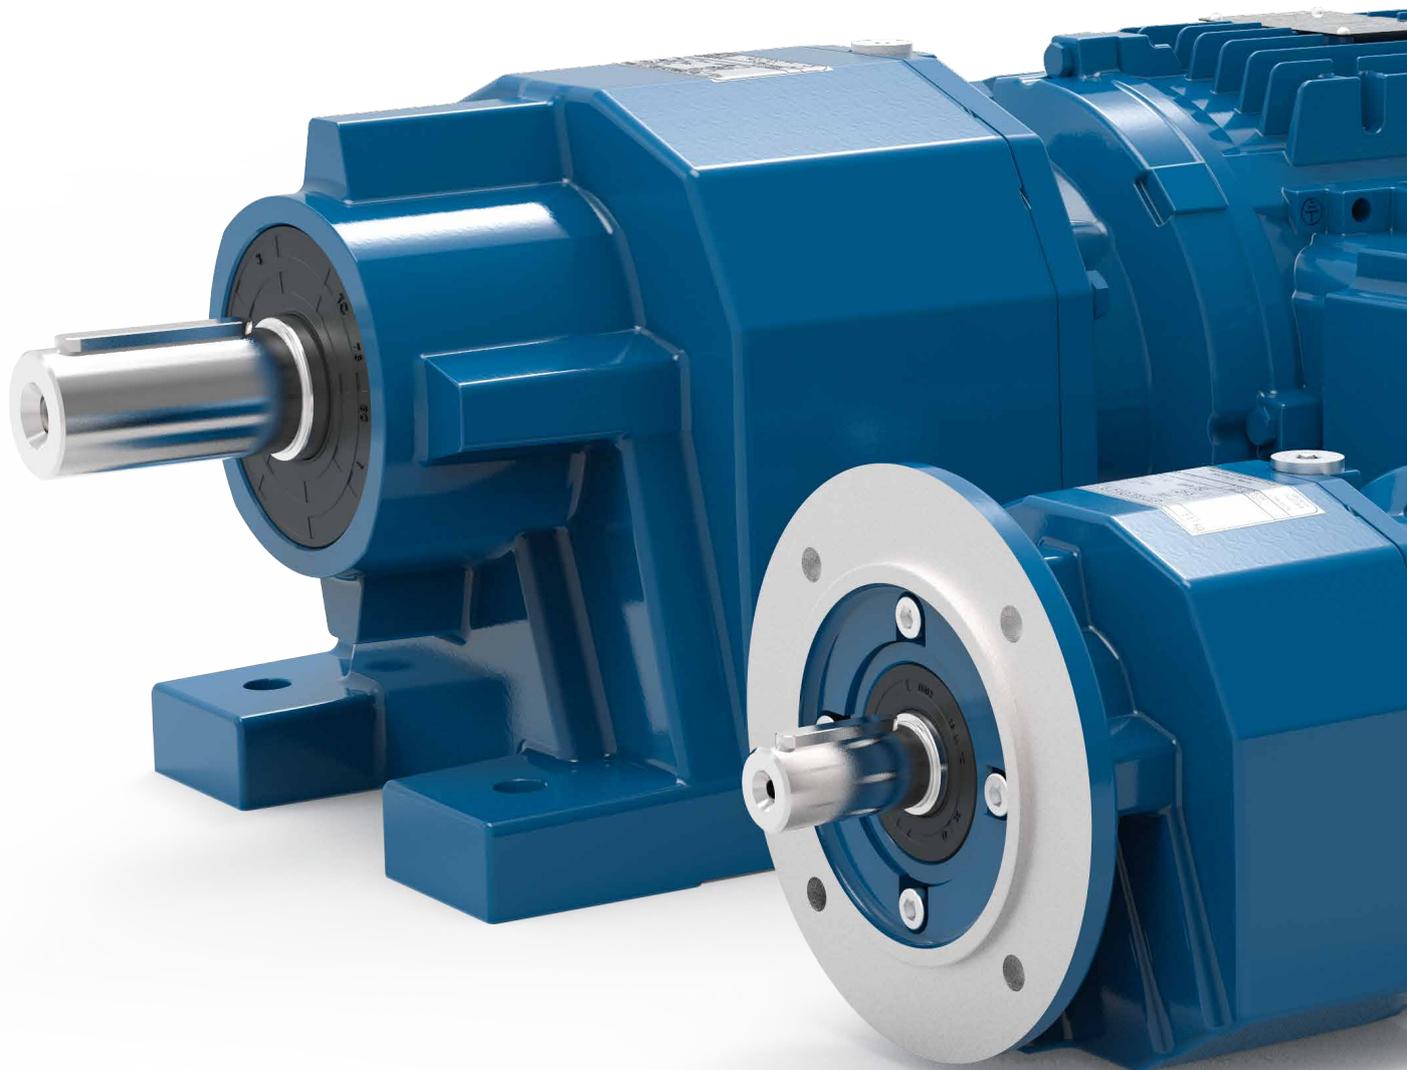

### Technical Data

		C00	C01	C03	C05	C06
Nominal torque	[Nm]	50	85	200	400	600
Number of stages		2-stage	2-stage	2-/3-stage	2-/3-stage	2-/3-stage
Ratio range		2.44 - 47.44	3.09 - 66.5	3.34 - 286.32	3.83 - 328.43	3.73 - 375.71
Speed range at 1400 rpm 50Hz	[rpm]	29 - 573	21 - 453	4 - 419	4 - 365	3 - 375
Power range 50 Hz	[kW]	0.12 - 0.75	0.12 - 1.5	0.12 - 3	0.12 - 7.5	0.12 - 7.5
Output shaft	[mm]	20 x 40	20 x 40	25 x 50	30 x 60 35 x 70	35 x 70
Output flange IEC	[mm]	120/140/160	120/140/160	140/160/200	160/200/250	200/250

## Design versions



Foot




Flange




## Standard mounting dimensions

Taking the most significant standard mounting dimensions available into account, the design allows for easy integration of WG20 geared motors into almost any existing systems.

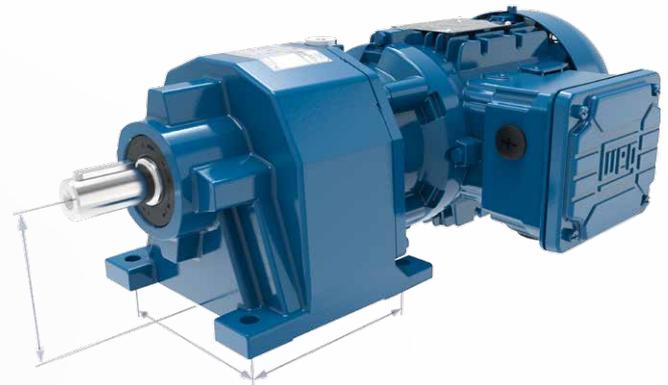

## Typical areas of application

Machines for timber processing companies, presses, conveyor belts, rotary tables, pumps, packaging machines, bakery equipment, lifts, looms, screw conveyors and screw compressors.

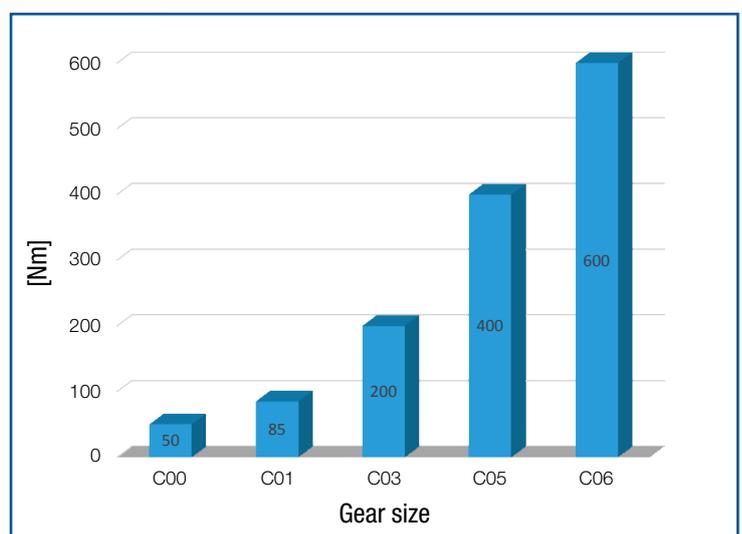


## Parallel shaft geared motors F

Thanks to their structural design, parallel shaft gear units are particularly suitable for conveyor technology applications.

All four sizes can be fitted with either a hollow shaft, output shaft, mounting flange or shrink disc.


The ratio range of gear unit sizes F04 and F05 can be extended by a third gear stage.

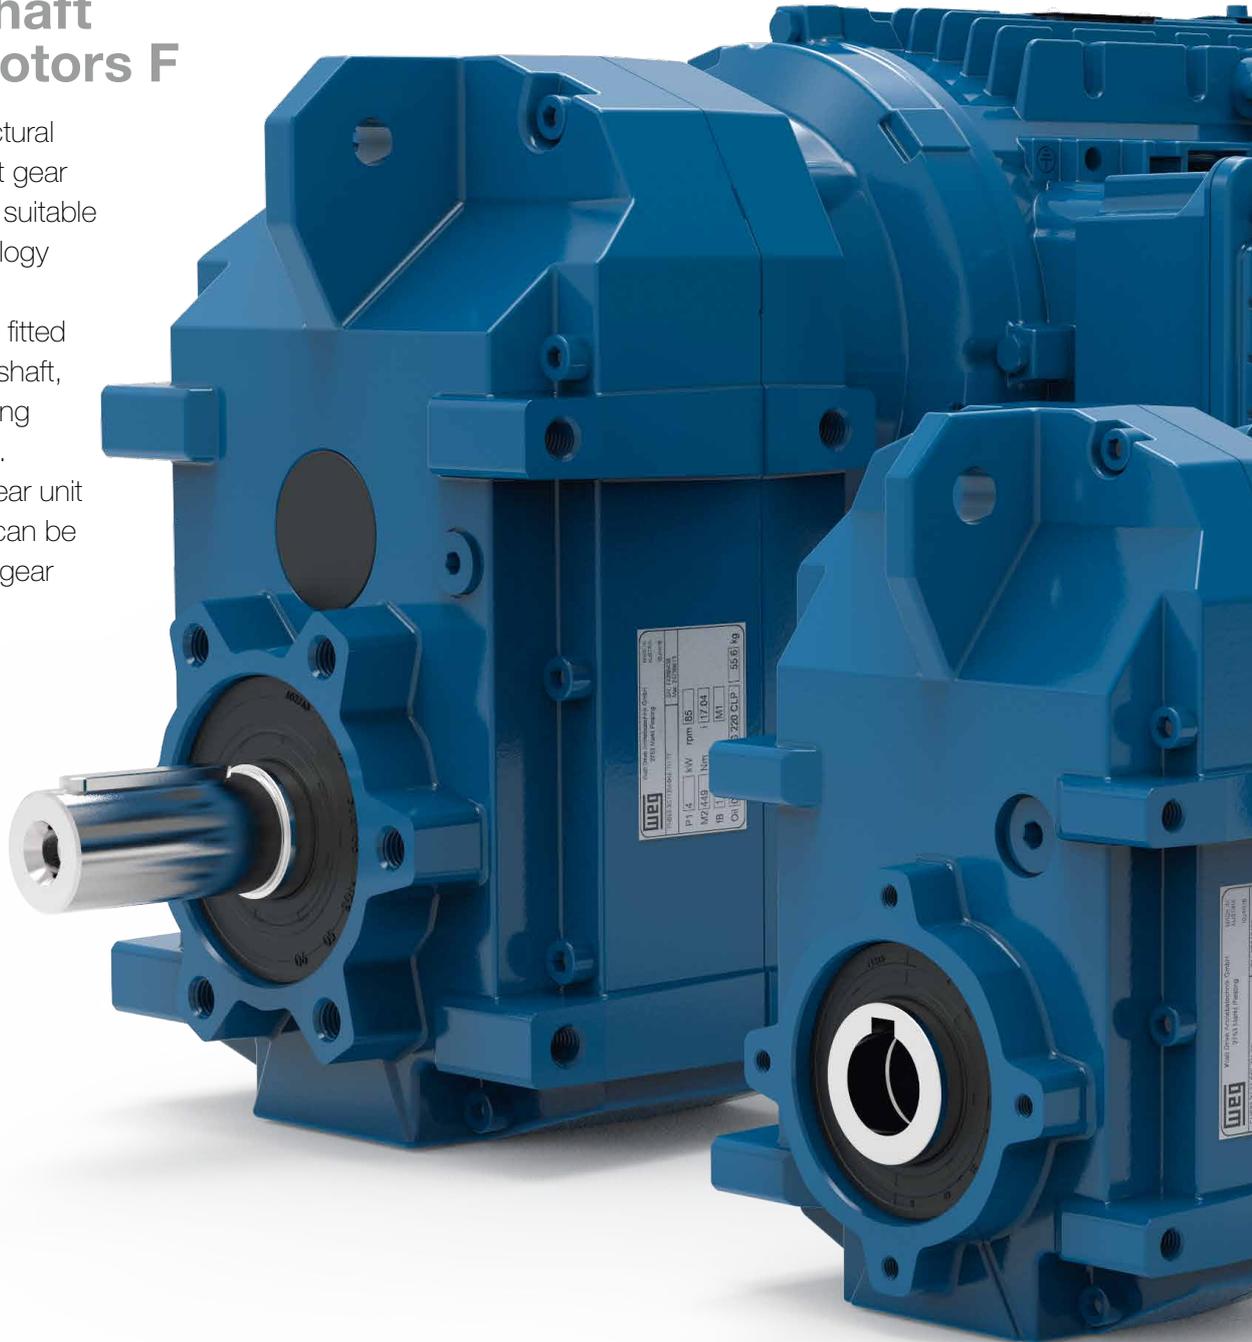


### Technical Data

		F02	F03	F04	F05
Nominal torque	[Nm]	130	220	400	600
Number of stages		2-stage	2-stage	2-/3-stage	2-/3-stage
Ratio range		3.93 - 97.85	3.85 - 70.17	4.42 - 422.98	5.17 - 487.67
Speed range at 1400 rpm 50Hz	[rpm]	14 - 356	20 - 363	3 - 316	3 - 271
Power range	[kW]	0.12 - 1.5	0.12 - 3	0.12 - 3	0.12 - 5.5
Output shaft/Ø hollow shaft	[mm]	25 x 50 / 25	25 x 50 / 30	30 x 60 / 35	35 x 70 / 40
Output flange IEC	[mm]	160	160	200	250


## Design versions

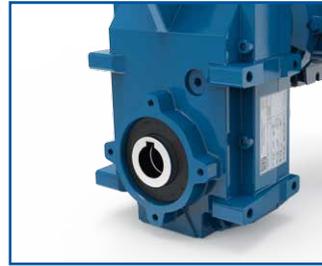

Hollow shaft

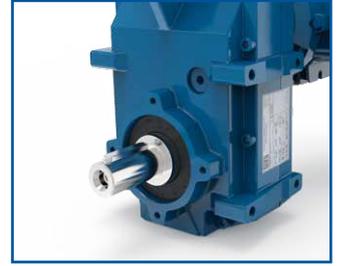


Output shaft

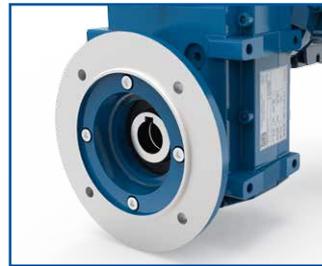

Flange



Shrink disc

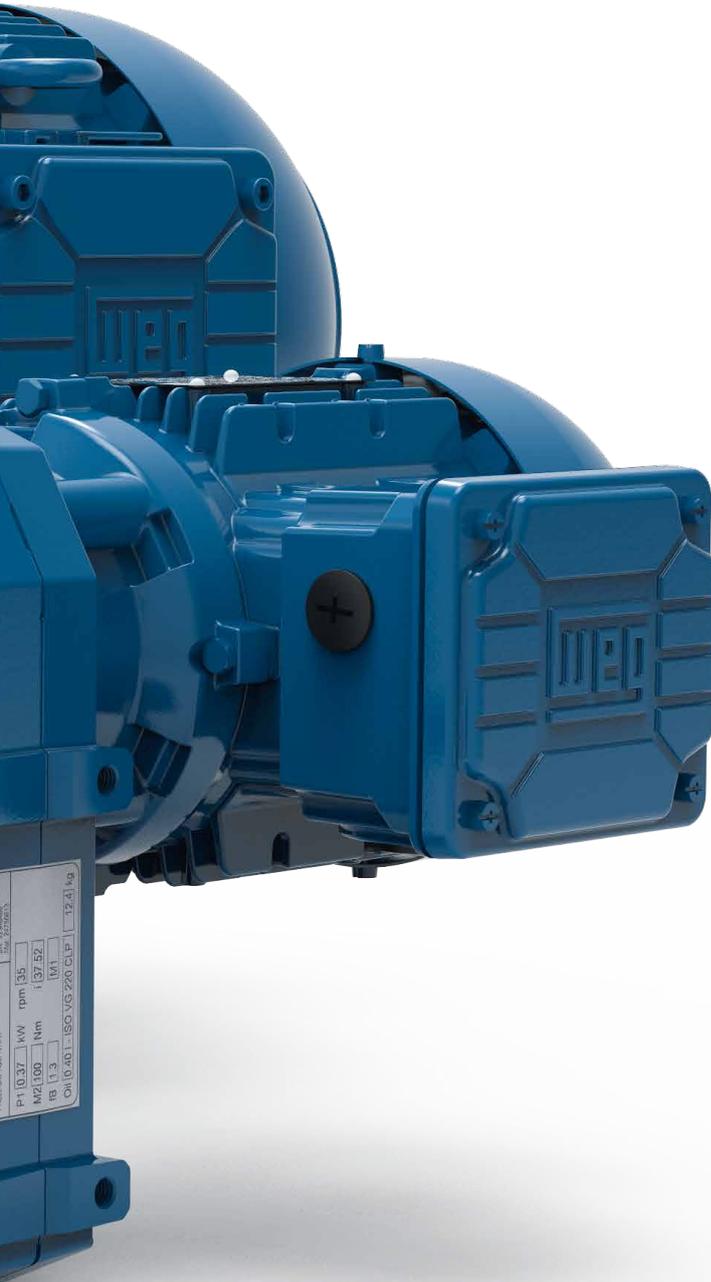


## Standard mounting dimensions

Taking the most significant standard mounting dimensions on the market into account, the design allows for the easy integration of WG20 geared motors into almost any existing systems.


## Typical areas of application

Machines for waste disposal and recycling, roller conveyors and laminating machines, machinery for timber processing companies, agitators, mixing equipment, stacking equipment, separators, screw conveyors, travel drives for cranes, welding equipment and surface aerators.

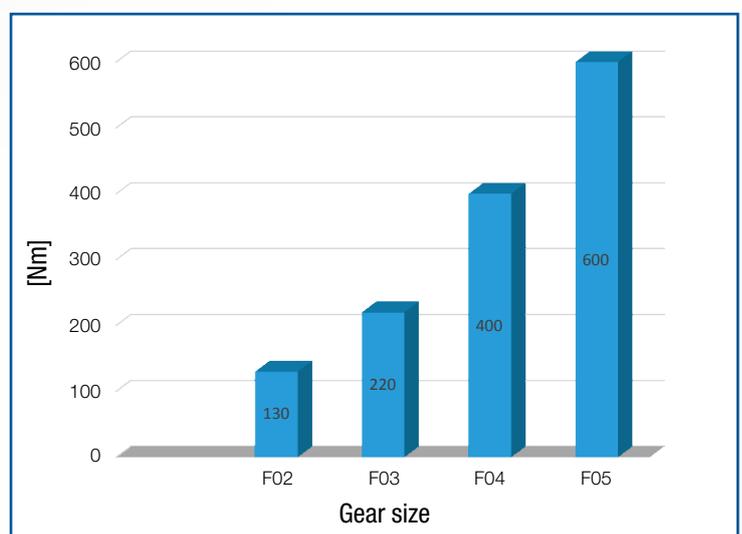

## Helical bevel geared motors K

Helical bevel gear units are suitable for a multitude of applications. The two-stage basic design is extended by a third gear stage upward of 200 Nm. K gear units can also be equipped with a hollow shaft, output shaft, shrink disc, torque arm and mounting flange.

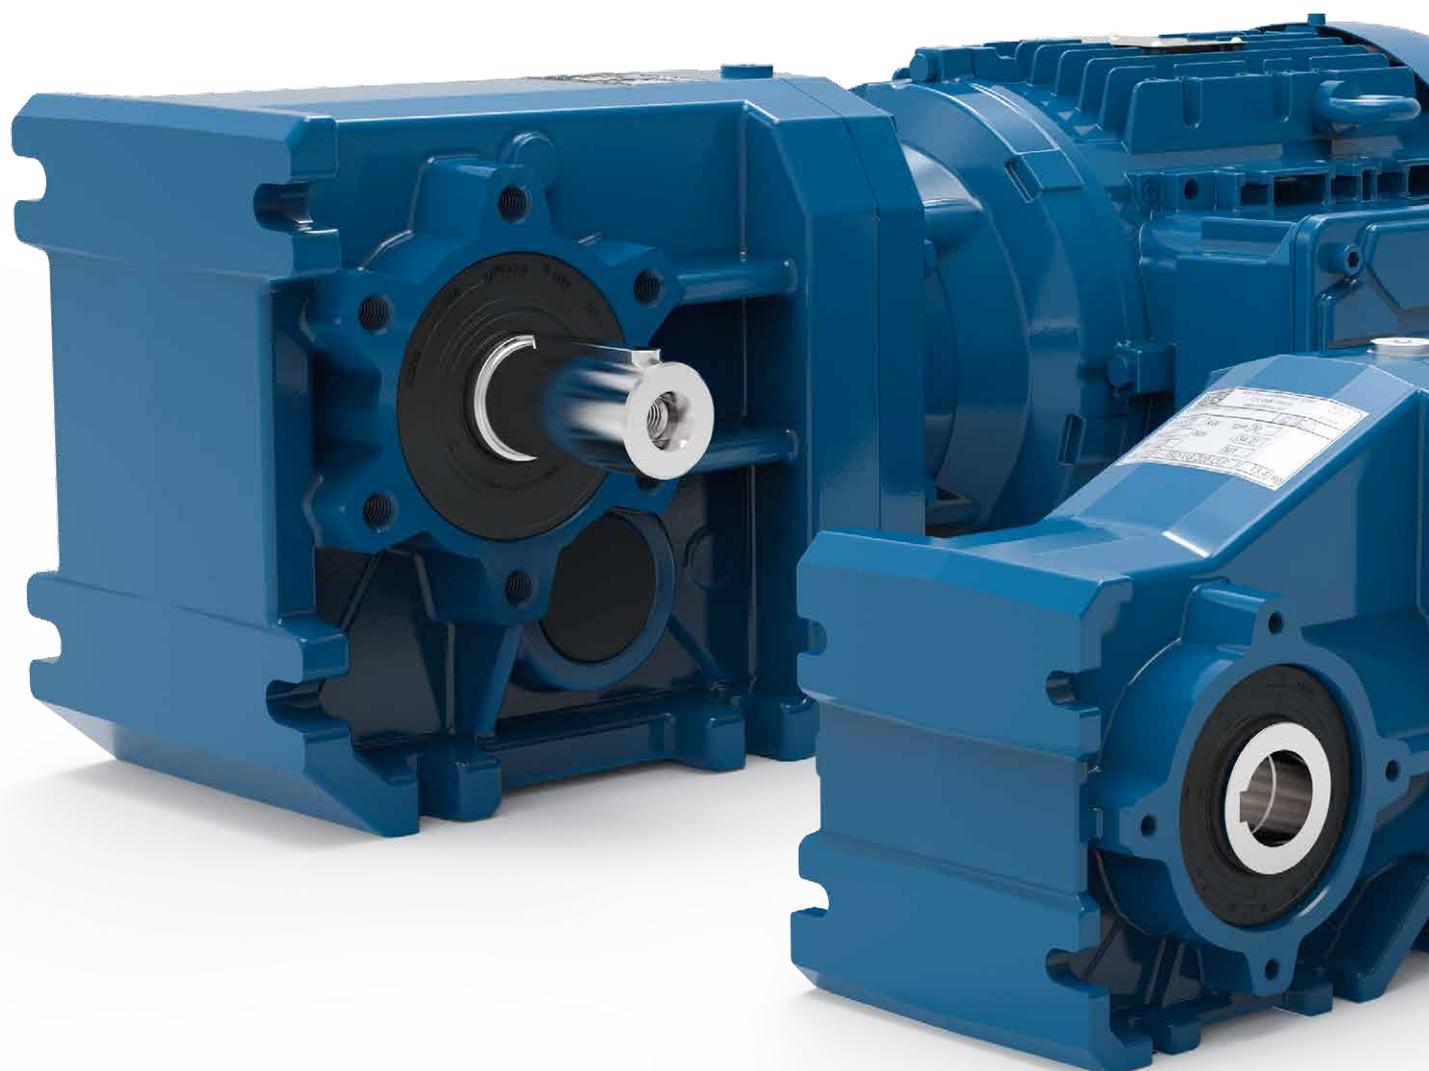

### Technical Data

		K02	K03	K04	K05
Nominal torque	[Nm]	110	200	400	600
Number of stages		2-stage	3-stage	3-stage	3-stage
Ratio range		3.82 - 68.88	4.17 - 217.88	5.05 - 277.79	4.27 - 245.7
Speed range at 1400 rpm 50 Hz	[rpm]	20 - 366	6 - 335	5 - 277	5 - 327
Power range	[kW]	0.12 - 1.5	0.12 - 3	0.12 - 4	0.12 - 5.5
Output shaft/Ø hollow shaft	[mm]	25 x 50 / 25	25 x 50 / 30	30 x 60 / 35	35 x 70 / 40
Output flange IEC	[mm]	160	160	200	250

## Design versions



Hollow shaft




Output shaft



Flange



Shrink disc and torque arm

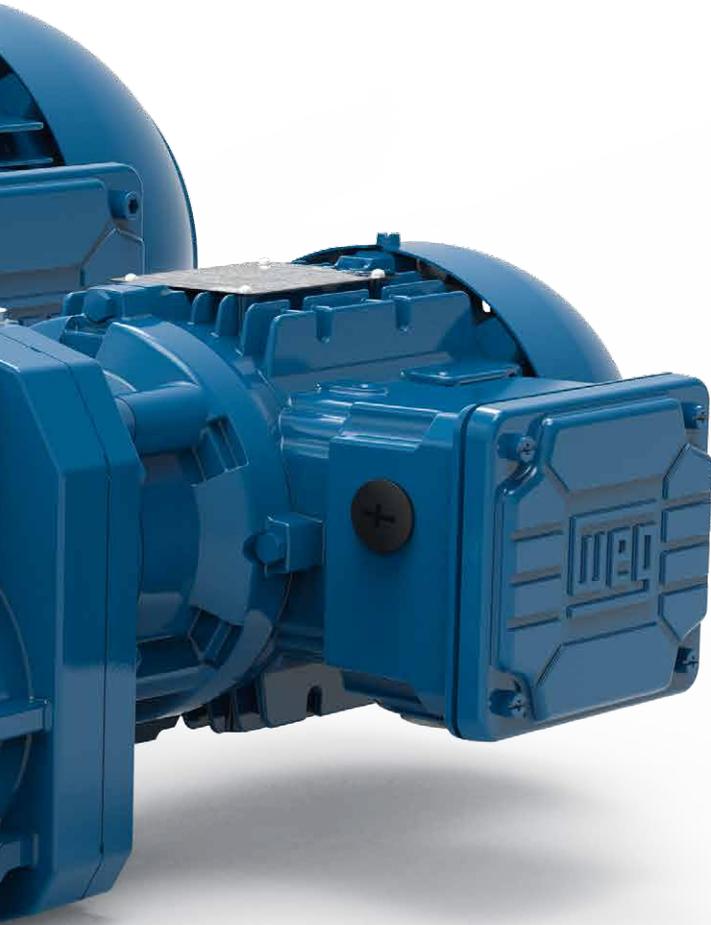


## Standard mounting dimensions

Taking the most significant standard mounting dimensions on the market into account, the design allows for easy integration of WG20 geared motors into almost any existing systems.

## Typical areas of application

Roller tables and laminating machines, agitators, winches, lifts, heavy duty conveyors for bulky goods, shredders, conveyor belts, baggage handling systems, scenery lifts for stage machinery, bulk material and unit conveyors, and concrete mixing plants.

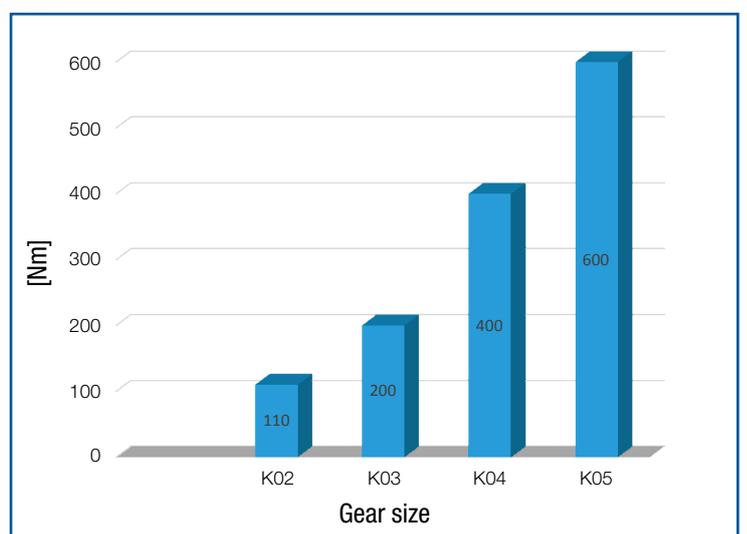


# Modular integral motor

The latest generation of WEG aluminium motors excels due to the user-friendly design to efficiency class IE3 and the reliable quality in various industrial sectors. The optimised design of the end shields and aluminium terminal box also results in a crucial reduction in weight.

Thanks to the special wide-range winding and nine-bolt terminal block, flexible use anywhere in the world is guaranteed. For specific requirements, it is extremely easy to additionally mount braking, encoder, or fan systems.



## Technical Data (standard)

<b>Power output</b>	0.12 to 7.5 kW
<b>Number of poles</b>	4 and 6
<b>IEC frame sizes</b>	63 to 132
<b>Voltages</b>	110 - 690, 50/60 Hz
<b>Efficiency class</b>	IE1, IE2 and IE3
<b>Thermal class</b>	F
<b>Protection class</b>	IP55
<b>Housing material</b>	Aluminium
<b>Thermal protection</b>	Bi-metal switch and thermistor protection PTC
<b>Frequency inverter operation</b>	to 460 V
<b>Certificates</b>	CE, UL/CSA, EAC

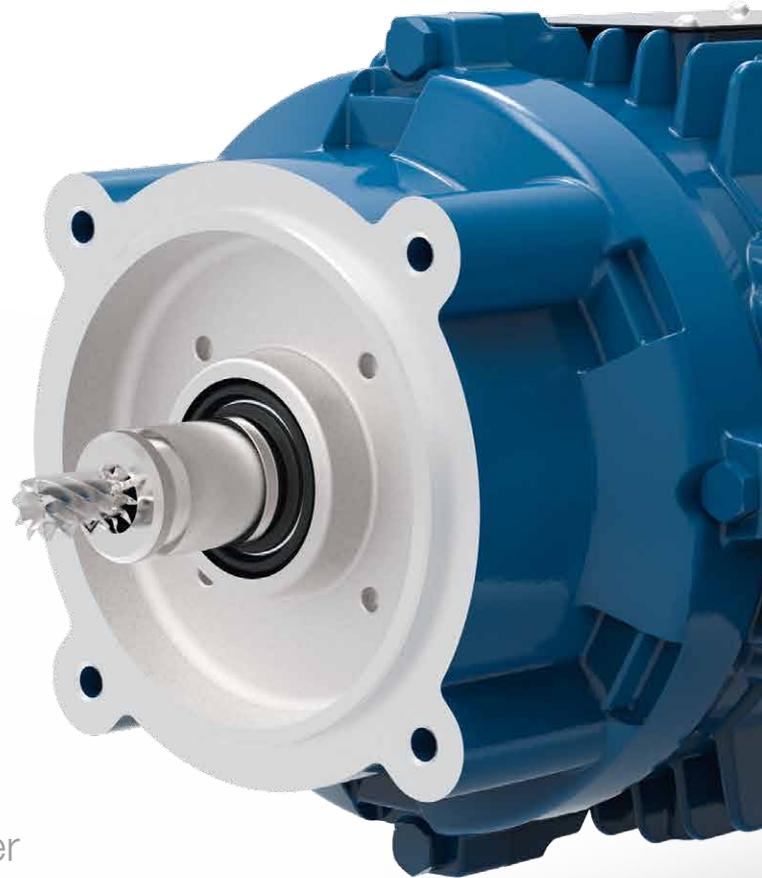

## 100 Hz characteristic - double the power

Modular motors are perfect for operation with electronic speed control. The 87/100/120 Hz voltage/frequency characteristic allows them to be operated in frequency inverter mode even without special windings. This allows the nominal output to be doubled without losing torque.

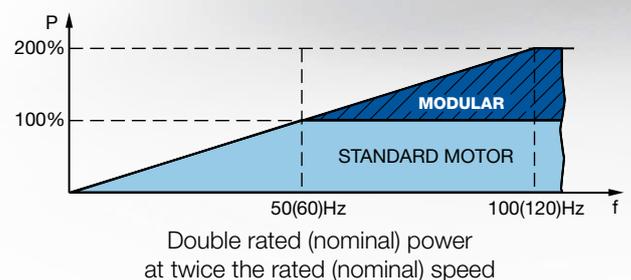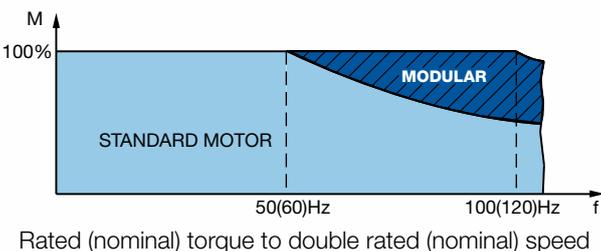

## Motor modules


The particular advantage of the modular motor range is the facility to add system kits to the standard model, allowing a multitude of useful modules to be adapted to the customer's requirements. Available motor modules include single and double brake systems, ventilation systems, extended terminal box systems, encoder systems (inside and outside the fan cover), back stops, protection caps, and hand wheel.



Spring loaded brake



Incremental encoder  
(Design for forced ventilation mode)

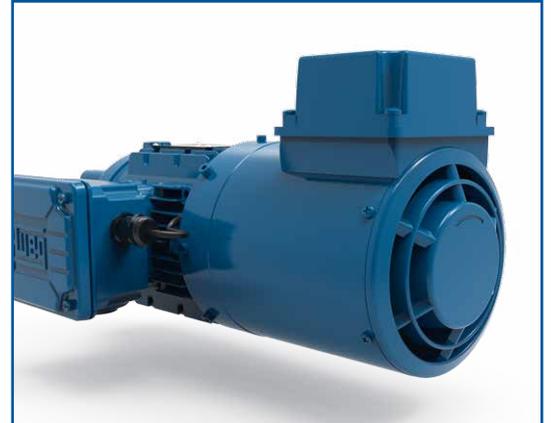

Forced ventilation

## Just switch over - and use worldwide

The special wide-range winding of the motor enables selection of up to four different voltage levels (star, delta, double star, and double delta) by means of twelve connection slots on the nine-bolt terminal block.

This allows modular motors to be used with almost any mains voltage and frequencies worldwide.

Furthermore, the terminal box dimensions have been changed for ease of access.





[www.cat4cad.com](http://www.cat4cad.com)

## Easy product selection

The “cat4CAD®” product configuration tool makes it easy to interactively select products. Comprehensive wizards, user-friendly navigation and many other extra features allow quick configuration of the required drive.

### Advantages

- Extensive product library
- Fast configuration of motors and geared motors
- Creation of project files with comprehensive technical documentation
- Easy modification of generated product data by means of the project file
- Quick request times

### Features

- The entire menu is available in many languages.
- To-scale 2D/3D drawings and PDF and DXF dimension sheet drawings of the previously selected drive.
- The 2D/3D data can be exported for use in standard CAD programs.
- Comprehensive technical data sheets of the configured gear unit and motor at the click of a button.
- The project file allows complete management of previously selected drives on one screen.  
At the click of a button one can save or print this project file, create PDF and DXF dimension drawings, and send enquiries directly to our sales team.

# Advantages for you



## A geared motor **for the whole world**

- Standard mounting dimensions
- Can be switched to different voltages around the world
- Certifications for international markets



## Sophisticated design **for more efficiency**

- Wide speed range
- High efficiency
- Low noise levels
- Optimised oil fill quantity
- Maintenance-free and lubricated for life
- High quality components and equipment
- Motors to efficiency class IE3



## Comprehensive equipment **for more flexibility**

- Can be extended by different motor modules
- Temperature monitoring without added costs
- Protection degree IP55 for the standard design
- Switchover to 100/120 Hz characteristic in frequency inverter operation



## The optimal programme **for lower costs**

- Reduction in operating costs for plant operators
- Standard mounting dimensions enable easy interchangeability without system conversion
- Low maintenance costs
- Flexibility and savings for purchasing, technology and warehousing



## One company **for more service**

- Complete drive applications from WEG
- Global WEG branches and sales partners
- Short delivery times
- Innovative product configuration tool

# WEG Worldwide Operations

## ARGENTINA

San Francisco - Cordoba  
Phone: +54 3564 421484  
[info-ar@weg.net](mailto:info-ar@weg.net)

Cordoba - Cordoba  
Phone: +54 351 4641366  
[weg-morbe@weg.com.ar](mailto:weg-morbe@weg.com.ar)

Buenos Aires  
Phone: +54 11 42998000  
[ventas@pulverlux.com.ar](mailto:ventas@pulverlux.com.ar)

## AUSTRALIA

Scoresby - Victoria  
Phone: +61 3 97654600  
[info-au@weg.net](mailto:info-au@weg.net)

## AUSTRIA

Markt Piesting - Wiener  
Neustadt-Land  
Phone: +43 2633 4040  
[watt@wattdrive.com](mailto:watt@wattdrive.com)

## BELGIUM

Nivelles - Belgium  
Phone: +32 67 888420  
[info-be@weg.net](mailto:info-be@weg.net)

## BRAZIL

Jaraguá do Sul - Santa Catarina  
Phone: +55 47 32764000  
[info-br@weg.net](mailto:info-br@weg.net)

## CHILE

La Reina - Santiago  
Phone: +56 2 27848900  
[info-cl@weg.net](mailto:info-cl@weg.net)

## CHINA

Nantong - Jiangsu  
Phone: +86 513 85989333  
[info-cn@weg.net](mailto:info-cn@weg.net)

Changzhou - Jiangsu  
Phone: +86 519 88067692  
[info-cn@weg.net](mailto:info-cn@weg.net)

## COLOMBIA

San Cayetano - Bogota  
Phone: +57 1 4160166  
[info-co@weg.net](mailto:info-co@weg.net)

## ECUADOR

El Batan - Quito  
Phone: +593 2 5144339  
[ceccato@weg.net](mailto:ceccato@weg.net)

## FRANCE

Saint-Quentin-Fallavier - Isère  
Phone: +33 4 74991135  
[info-fr@weg.net](mailto:info-fr@weg.net)

## GERMANY

Türnich - Kerpen  
Phone: +49 2237 92910  
[info-de@weg.net](mailto:info-de@weg.net)

Unna  
Phone: +49 2303 986870  
[info@wattdrive.de](mailto:info@wattdrive.de)

Balingen - Baden-Württemberg  
Phone: +49 7433 90410  
[info@weg-antriebe.de](mailto:info@weg-antriebe.de)

Homberg (Efze) - Hesse  
Phone: +49 5681 99520  
[info@akh-antriebstechnik.de](mailto:info@akh-antriebstechnik.de)

## GHANA

Accra  
Phone: +233 30 2766490  
[info@zestghana.com.gh](mailto:info@zestghana.com.gh)

## INDIA

Bangalore - Karnataka  
Phone: +91 80 41282007  
[info-in@weg.net](mailto:info-in@weg.net)

Hosur - Tamil Nadu  
Phone: +91 4344 301577  
[info-in@weg.net](mailto:info-in@weg.net)

## ITALY

Cinisello Balsamo - Milano  
Phone: +39 2 61293535  
[info-it@weg.net](mailto:info-it@weg.net)

## JAPAN

Yokohama - Kanagawa  
Phone: +81 45 5503030  
[info-jp@weg.net](mailto:info-jp@weg.net)

## MALAYSIA

Shah Alam - Selangor  
Phone: +60 3 78591626  
[info@wattdrive.com.my](mailto:info@wattdrive.com.my)

## MEXICO

Huehuetoca - Mexico  
Phone: +52 55 53214275  
[info-mx@weg.net](mailto:info-mx@weg.net)

Tizayuca - Hidalgo  
Phone: +52 77 97963790

## NETHERLANDS

Oldenzaal - Overijssel  
Phone: +31 541 571080  
[info-nl@weg.net](mailto:info-nl@weg.net)

## PERU

La Victoria - Lima  
Phone: +51 1 2097600  
[info-pe@weg.net](mailto:info-pe@weg.net)

## PORTUGAL

Maia - Porto  
Phone: +351 22 9477700  
[info-pt@weg.net](mailto:info-pt@weg.net)

## RUSSIA and CIS

Saint Petersburg  
Phone: +7 812 363 2172  
[sales-wes@weg.net](mailto:sales-wes@weg.net)

## SCANDINAVIA

Mölnlycke - Sweden  
Phone: +46 31 888000  
[info-se@weg.net](mailto:info-se@weg.net)

## SINGAPORE

Singapore  
Phone: +65 68589081  
[info-sg@weg.net](mailto:info-sg@weg.net)

Singapore  
Phone: +65 68622220  
[watteuro@watteuro.com.sg](mailto:watteuro@watteuro.com.sg)

## SOUTH AFRICA

Johannesburg  
Phone: +27 11 7236000  
[info@zest.co.za](mailto:info@zest.co.za)

## SPAIN

Coslada - Madrid  
Phone: +34 91 6553008  
[wegiberia@wegiberia.es](mailto:wegiberia@wegiberia.es)

## UK

Redditch - Worcestershire  
Phone: +44 1527 513800  
[info-uk@weg.net](mailto:info-uk@weg.net)

## UNITED ARAB EMIRATES

Jebel Ali - Dubai  
Phone: +971 4 8130800  
[info-ae@weg.net](mailto:info-ae@weg.net)

## USA

Duluth - Georgia  
Phone: +1 678 2492000  
[info-us@weg.net](mailto:info-us@weg.net)

Minneapolis - Minnesota  
Phone: +1 612 3788000

## VENEZUELA

Valencia - Carabobo  
Phone: +58 241 8210582  
[info-ve@weg.net](mailto:info-ve@weg.net)

For those countries where there is not a WEG own operation, find our local distributor at [www.weg.net](http://www.weg.net).



Watt Drive Antriebstechnik GmbH  
Wöllersdorfer Straße 68  
2753 Markt Piesting, AUSTRIA  
Phone: +43 (0) 2633 404-0  
[watt@wattdrive.com](mailto:watt@wattdrive.com)  
[www.wattdrive.com](http://www.wattdrive.com)

